

SUBMITTAL

TEADIT Style NA 1001

Manufacturer – Teadit – North America, Inc.

Compressed Non-Asbestos Gasket


Gaskets meet the pressure ratings, drilling and dimensions of ANSI/ASME B16.2.1

Style NA 1001

Compressed Sheet Packing Aramid Fibers/NBR Binder (Green or White)

Media

- Water / Potable & Reclaim
- Air
- Brine
- Sludge
- Waste Water
- Low pressure steam
- Organic and Weak inorganic acids
- Concentrated and diluted alkalis (PH range from 1 to 11)
- Chemicals
- Petroleum and petroleum derivatives
- Chlorinated solvents
- Refrigerants

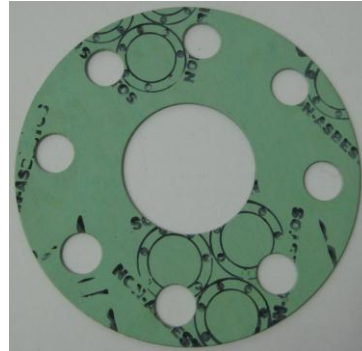

Specifications

Max. Temperature:	750	(° F)
Max Operating Temperature:	460	(° F)
Max. Pressure: (Vacuum)	1595	(PSI)
Continuous Max (Vacuum)	725	(PSI)
Compressability (ASTM F-36)	11	
Recovery (ASTM F-36)	60%	

ASTM: (F712120E22M5)

Availability

Full Face Ring 1/16" Thick 1/8" Thick

Benefits

- Manufactured from a non-asbestos material formulated for services in most sealing applications as a universal replacement gasket.
- These gaskets have a non-stick coating.

TRIPAC

475 Klug Circle-Corona, CA. 92880 (951) 280-4488 - Fax: (951) 272-4445