

SUBMITTAL

VITON®

Manufacturer – Thermodyn Corporation


Gaskets meet the pressure ratings, drillings and dimensions of ANSI/ASME B16.2.1
ASTM D-2000/D-2240

Viton

Commercial Grade 100% Fluoroelastomer Viton TD-70C

Media

- Most Common Chemicals
- Methane
- Chlorine Diluted Water (3%)
- Chlorinated Salt Brine

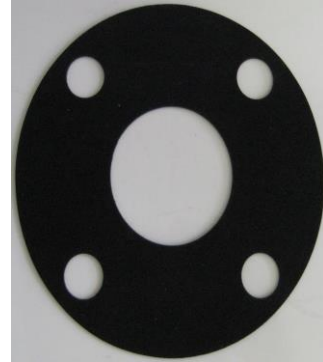

Specifications

Max. Temperature:	-17°C - 350°C
Durometer / Hardness	75 (+/-) 5 SHORE A
Tensile Strength ASTM F-152	1,200 (PSI) MIN
Elongation	250% MIN
Specific Gravity	1.92
Finish	Smooth / Black

Availability

- Full Face Ring 1/16" Thick 1/8" Thick 1/4" Thick

Notes

- Not recommended for use of MEK, steam and methanol.
- This product offers excellent resistance to fuel, and hydrocarbon based fluids.

TRIPAC

475 Klug Circle-Corona, CA. 92880 (951) 280-4488 - Fax: (951) 272-4445