


WATER WORKS T-HEAD BOLTS

ANSI/AWWA C111/A21.11.95
ANSI/ASME B1.1 CLASS 2A, B1.2 CLASS 2B

DIMENSIONAL INFORMATION

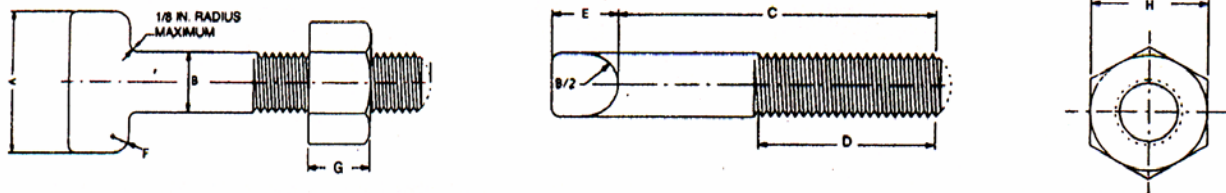

SIZE	± 0.05	UN THREADED SHANK + 0.030 - 0.074	+ 0.25 - 0.06	THREAD LENGTH	+ .015 - 0.03		NUT THICKNESS	NUT WIDTH ACROSS FLATS
	A	B	C	D	E	F	G	H
5/8 - 11 x 3	1.50	0.625	3.0	2.00	0.625	0.312	0.625 ± 0.04	1.062 ± 0.00 - 0.04
5/8 - 11 x 5	1.75	0.625	5.0	2.00	0.625	0.312	0.625 ± 0.04	1.062 ± 0.00 - 0.04
3/4 - 10 x 3 1/2	1.75	0.750	3.5	2.50	0.750	0.375	0.750 ± 0.06	1.250 ± 0.00 - 0.06
3/4 - 10 x 4	1.75	0.750	4.0	3.00	0.750	0.375	0.750 ± 0.06	1.250 ± 0.00 - 0.06
3/4 - 10 x 4 1/2	1.75	0.750	4.5	3.00	0.750	0.375	0.750 ± 0.06	1.250 ± 0.00 - 0.06
3/4 - 10 x 5	1.75	0.750	5.0	3.00	0.750	0.375	0.750 ± 0.06	1.250 ± 0.00 - 0.06
3/4 - 10 x 5 1/2	1.75	0.750	5.5	3.00	0.750	0.375	0.750 ± 0.06	1.250 ± 0.00 - 0.06
3/4 - 10 x 6	1.75	0.750	6.0	3.00	0.750	0.375	0.750 ± 0.06	1.250 ± 0.00 - 0.06
3/4 - 10 x 6 1/2	1.75	0.750	6.5	3.50	0.750	0.375	0.750 ± 0.06	1.250 ± 0.00 - 0.06
3/4 - 10 x 7	1.75	0.750	7.0	4.00	0.750	0.375	0.750 ± 0.06	1.250 ± 0.00 - 0.06
3/4 - x 9	1.75	0.750	9.0	5.00	0.750	0.375	0.750 ± 0.06	1.250 ± 0.00 - 0.06
1 - 8 x 5	2.25	1.000	5.0	3.00	1.000	0.500	0.100 ± 0.08	1.625 ± 0.00 - 0.08
1 - 8 x 6	2.25	1.000	6.0	3.00	1.000	0.500	0.100 ± 0.08	1.625 ± 0.00 - 0.08
1 1/4 - 7 x 6	2.50	1.250	6.0	3.50	1.250	0.625	0.125 ± 0.08	2.000 ± 0.00 - 0.08
1 1/4 - 7 x 6 1/2	2.50	1.250	6.5	3.50	1.250	0.625	0.125 ± 0.08	2.000 ± 0.00 - 0.08

Available in: • T-316 Stainless

• ASTM A242 Weathering Steel (Atmospheric corrosion resistant steel)

Tripac 2000 Blue can be applied upon request

TRIPAC

A DIVISION OF TRIPAC MARKETING, INC.

475 KLUG CIRCLE • CORONA, CA 92880-6406
(951) 280-4488 • FAX: (951) 272-4445