


OVAL NECK TRACK BOLTS

ANSI/ASME B18.10

DIMENSIONAL INFORMATION

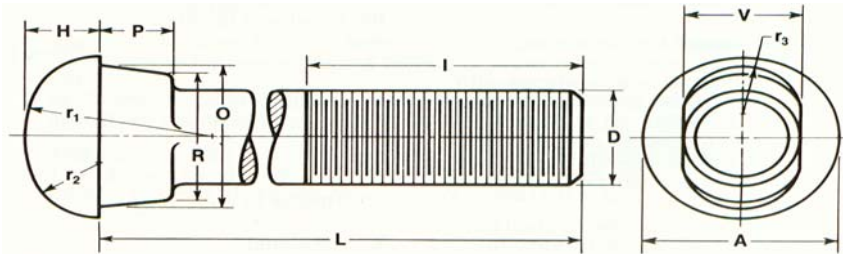

NOMINAL DIAMETER OVER THREAD	HEAD				NECK					LENGTH UNDER HEAD	THREAD LENGTH MIN
	A	H	R ₁	R ₂	O	R	P	R ₃	V	L	I
1/2 - 13 x 2 3/4	7/8	5/16	11/16	9/32	5/8	19/32	5/16	1/2 body diam. of bolt	Same as body diam. of bolt	Under 7 in. by steps of 1/4 in. From 7 to 10 in. by steps of 1/2 in.	1 1/8
5/8 - 11 x 3 1/4	1 5/64	25/64	59/64	23/64	13/16	25/32	3/8				1 1/4
5/8 - 11 x 4 1/2	1 5/64	25/64	59/64	23/64	13/16	25/32	3/8				1 1/4
5/8 - 11 x 6	1 5/64	25/64	59/64	23/64	13/16	25/32	3/8				1 1/4
5/8 - 11 x 8	1 5/64	25/64	59/64	23/64	13/16	25/32	3/8				1 1/4
5/8 - 11 x 9 1/2	1 5/64	25/64	59/64	23/64	13/16	25/32	3/8				1 1/4
5/8 - 11 x 10	1 5/64	25/64	59/64	23/64	13/16	25/32	3/8				1 1/4
5/8 - 11 x 10 1/2	1 5/64	25/64	59/64	23/64	13/16	25/32	3/8				1 1/4
5/8 - 11 x 15	1 5/64	25/64	59/64	23/64	13/16	25/32	3/8				1 1/4
3/4 - 10 x 5	1 9/32	15/32	1 5/32	7/16	1 1/16	1 1/32	7/16				1 3/4
7/8 - 9 x 5	1 31/64	35/64	1 25/64	33/64	1 7/32	1 3/16	1/2				2
1 - 8 x 3 1/2	1 11/16	5/8	1 5/8	19/32	1 3/8	1 11/32	9/16				2 1/4
1 - 8 x 5 1/2	1 11/16	5/8	1 5/8	19/32	1 3/8	1 11/32	9/16				2 1/4
1 - 8 x 6 1/2	1 11/16	5/8	1 5/8	19/32	1 3/8	1 11/32	9/16				2 1/4
1 1/8 - 7 x 4	1 57/64	45/64	1 55/64	43/64	1 17/32	1 1/2	5/8				2 1/2

* Information obtained from the Industrial Fasteners Institute, "Fastener Standards, Sixth Edition" Page C-58

TRIPAC

A DIVISION OF TRIPAC MARKETING, INC.

475 KLUG CIRCLE • CORONA, CA 92880-6406
(951) 280-4488 • FAX: (951) 272-4445